

TEUPEN 67Aic



FEATURES

CHASSIS

- Powerful track drive with hydraulic braking system
- Precise maneuvering via sensitive remote control
- White, non-marking rubber tracks with specially arranged profile for optimal grip
- Hydraulically height- and width-adjustable crawler track drive

STABILIZATION

- Electrohydraulic stabilizers with automatic leveling and ground pressure sensor system
- 4 sliding pads (33.5 in x 13.4 in x 3.0 in)

BOOM SYSTEM

- All functions available via radio remote control

POWER SOURCE

- Diesel engine Kubota D902, (16,1 kW / 21,6 hp)
- Start-Stop device for combustion engine in the platform

SAFETY AND QUALITY

- Hydraulic emergency lowering via electric pump
- Lockable storage box
- Protected, internal power track for platform control
- Hydraulic system filled with biodegradable hydraulic oil
- High-quality paint in RAL 3020 (red)
 - » Hydraulic cylinders in RAL 9006 (white aluminium)
 - » Engine unit and component support in RAL9006 (white aluminium)
- Unlockable check valves located directly on hydraulic cylinders
- Hydraulic system protected by pressure relief valves
- Display on chassis
- Platform insulated up to 46 kV (category C)
- Hour meter
- Tree package including
 - » Tree package light
 - » 4 covers, piston rod (stabilizer)



EN ISO 9001



ANSI/SIA A92.20

US



GLOBAL RENTAL SALES

| 800.445.6295

| INFO@GLOBALRENTAL.COM

| GLOBALRENTAL.COM

TEUPEN 67AiC


SPECIFICATIONS

PERFORMANCE

Max Working Height	73 ft 5 in
Max Platform Height	66 ft 11 in
Max Horizontal Outreach	43 ft 7 in
Max Up-and-Over Clearance	27 ft 2 in
Max Platform Capacity (1 Person)	348 lbs
Platform Rotation	180°
Max Turntable Rotation	Endless
Stabilization, Maximum Ground Slope	16,7° / 30,0 %
Height and Width Track Adjustment	9 / 8 in
Gradeability, Max	16,7° / 30,0 %
Slope Angle, Max	16,7° / 30,0 %
Travel Speed, Max	1.9 mph

WEIGHT*

Total Weight	10,803 lbs
Live Load in Traveling Position	77.2 psf
Live Load in Working Position	32.3 psf
Point load per outrigger plate, max.	6,744 lbf

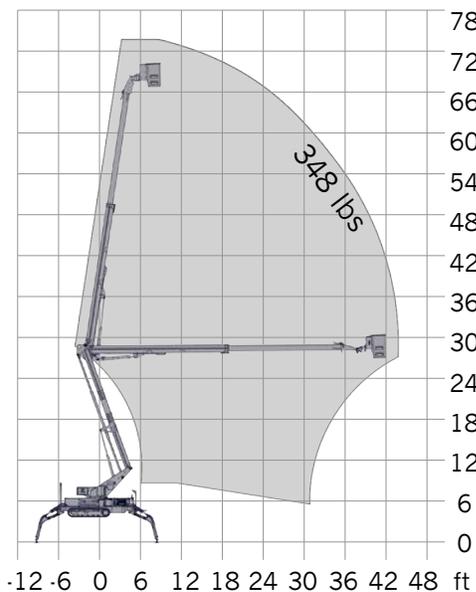


* Weight and dimensions may vary depending on options and accessories

MEASUREMENTS*

Platform Height (A)	3 ft 7 in
Platform Length (B)	2 ft 5 in
Platform Width (C)	2 ft 4 in
Length (D)	26 ft 2 in
Height (F)	7 ft 7 in
Width, min. (G)	5 ft 2 in
Max Ground Clearance (H)	1ft 4 in
Track (LxW) (I)	6 ft 3 in x 9 in
Stabilizer footprint (length) (J)	18 ft 8 in
Stabilizer footprint (width) (K)	18 ft 4 in
Stabilizer plate (length x width)	12 in x 8 in

POWER SOURCES

Combustion engine (Diesel)	Kubota D902 (16,1 kW / 21,6 hp)
Fuel Tank Capacity (Diesel Engine)	10.75 gal

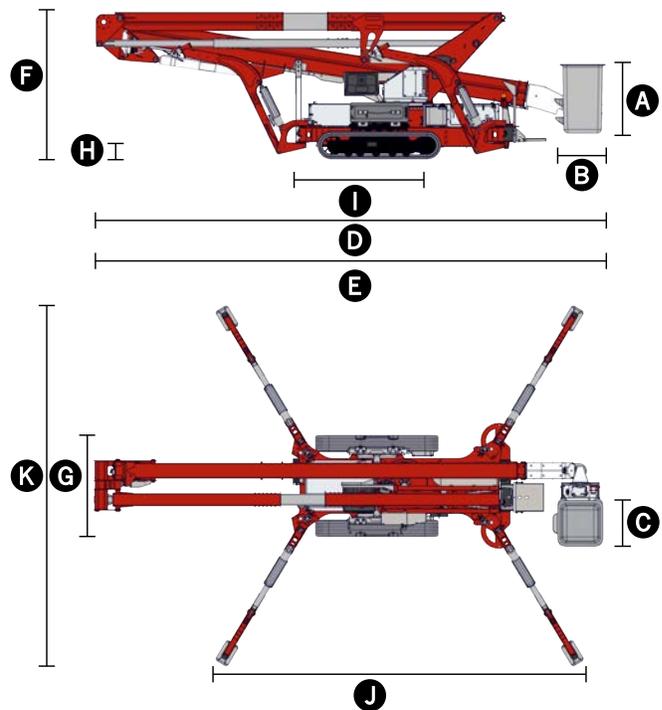

For more complete information on available Global Rental products and services, visit us on the web at www.globalrental.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact a Global Rental Sales representative for all available options. Global Rental Co., Inc.® and the Global Rental logo are registered trademarks of Global Rental Co., Inc. in the United States and various other countries and may not be used without permission. Global Rental and its affiliated companies did not manufacture the product on this brochure, do not guarantee or assume any responsibility for its safety, and disclaim any and all warranties, implied or otherwise. © 2024 Global Rental Co., Inc. All Rights Reserved. GLR-OS-TEUPEN-67AiC-224-v3



GLOBAL RENTAL SALES

800.445.6295

INFO@GLOBALRENTAL.COM

GLOBALRENTAL.COM